

# mini FLOWWATCH® 3 WiFi DESIGN

**SICCOM**

WiFi connected pump in duct version, ready to install, for the condensate removal from air conditioners up to 10kW / 36000BTU.

Ref: DE05WFCD760



All the benefits of the  
**mini FLOWWATCH® 3 WiFi**  
in a trunking version



## BENEFITS



### Web interface

The interface is accessible from a computer, smartphone, or tablet and requires no software or application installation.



### Email sending in case of alarm

Be notified immediately in the event of a malfunction (3 alarm cases).



### Real time supervision

Access a wealth of information about your pump fleet in just a few clicks.



### Pump interconnection

Create a network of pumps, and allow them to communicate with each other for more productive management of your pump fleet.



### Extremely silent

The quietest pump of our range (18.6 dBA), for an installation in any room.



### Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.


## SPECIFICATIONS

Flowrate max	15 l/h
Discharge head	10 m
Electrical power	21W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise level*	
Protection rating	IPX4
Thermal protection	Yes
Operating cycle**	100%
Power / alarm cable	1.6 m
Trunking dimensions	80 x 55 x 800 mm

\* Notation from 1 wave ( $\leq 20$  dBA) to 6 waves ( $> 45$  dBA)

\*\* The pump is able to run 100% of the time if necessary.

## FLOWRATE

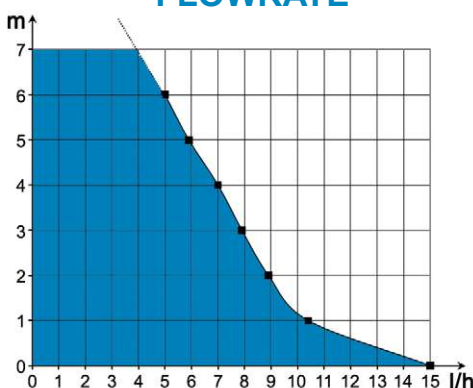

### Kit pre-assembled

Pump is already installed in its duct. Installation is easy and quick.

## CONTENTS



Duct with elbow- Finishing gasket - Finishing ceiling plate - Pump - Reservoir with air-vent tube - Power / alarm cable - Reservoir stand - Inlet tube - Suction tube 0.25m - Screws and rawlplugs