

mini FLOWATCH® 3 WiFi

As a real product of predictive maintenance, the mini FLOWATCH® 3 WiFi allows to remotely supervise a fleet of pumps and to anticipate a maintenance on a pump or an air conditioner. For air conditioners up to 10kW / 36000BTU.

Ref: DE05WFCC760



PREMIUM




Hose diameter
Suction : 5/7 mm - supplied
Discharge : 6/9 mm - not supplied


The first
condensate pump
WiFi connected




Monitor your **pump fleet** in the blink of an eye!

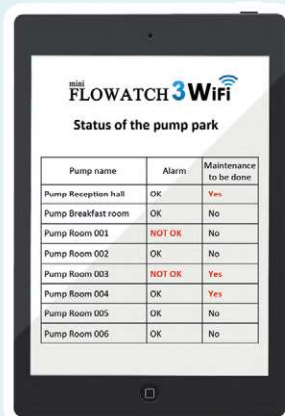

View all pump datas

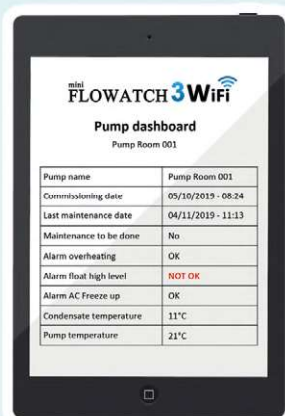


The pump sends you an email when an alarm triggers!

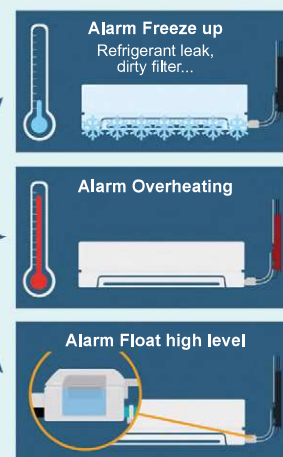

SPECIFICATIONS

Flowrate max	15 l/h
Suction head max	2 m
Discharge head max	10 m
Electrical power	21W
Voltage	220-240V 50/60Hz
Alarm	NC
Noise level	
Protection rating	IPX4
Thermal protection	Yes
Operating cycle*	100%
Power / alarm cable	1.6 m
Dimensions	272 x 35 x 43 mm / 75 x 38 x 36 mm
Certifications	CE, UKCA, EAC

* The pump is able to run 100% of the time if necessary.

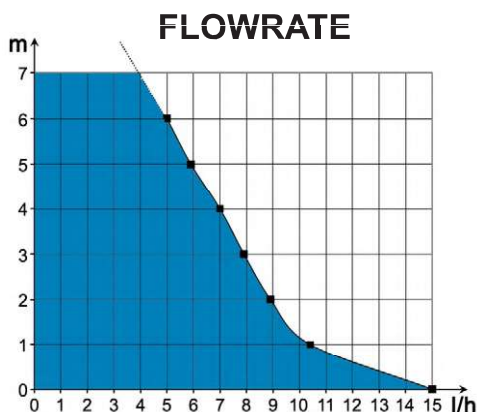

BENEFITS



Web interface

The interface is accessible from a computer, smartphone, or tablet and requires no software or application installation.



Email sending in case of alarm

Be notified immediately in the event of a malfunction (3 alarm cases).



Real-time supervision

Access a wealth of information about your pump fleet in just a few clicks.



Pump interconnection

Create a network of pumps, and allow them to communicate with each other for more productive management of your pump fleet.



Extremely silent

One of the quietest pump of our range (18.6 dBA), for an installation in any room.



Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.

CONTENTS

Pump - Reservoir with air-vent tube - Reservoir stand - Double-side adhesives - Inlet tube - Suction tube 1.8m - Clamps