

# SUNNY FLOWWATCH® DUO



**SICCOM**

Mini tank pump (solenoid) for the condensate removal of gas condensing boilers up to 60kW / 200 000BTU.

Ref: DE05NCC090



**PREMIUM**

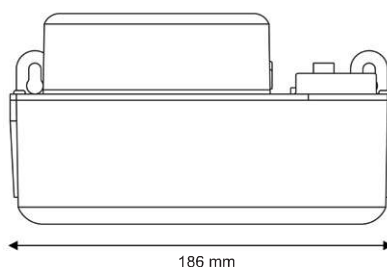

Hose diameter  
Discharge : 6/9 mm - not supplied

**pH > 2.5**



## SPECIFICATIONS

Flowrate max	19 l/h
Discharge head max	10 m
pH tolerated	pH > 2.5
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC
Noise level	
Protection rating	IPX4
Thermal protection	Yes
Operating cycle**	100%
Power / alarm cable	1.5 / 1.3 m
Dimensions	186 x 110 x 100 mm
Certifications	CE, EAC

\* The pump is able to run 100% of the time if necessary.

## BENEFITS



### Very silent

Very silent pump, suitable for an installation in any room.



### Compact tank pump

The SUNNY FLOWWATCH® DUO offers the best tank capacity/pump size of the market.



### IPX4 protection

Protected against water splashes.



### Removable integrated filter

Prevent dust and particles to damage the pump. Easy to remove and to clean.




### Mounting brackets

Thanks to its mounting brackets (and screws and rawplugs supplied), pump can be easily fixed to the wall.



### Inlet adapter included

This adapter allows condensate to enter the pump via tubes of different diameters.

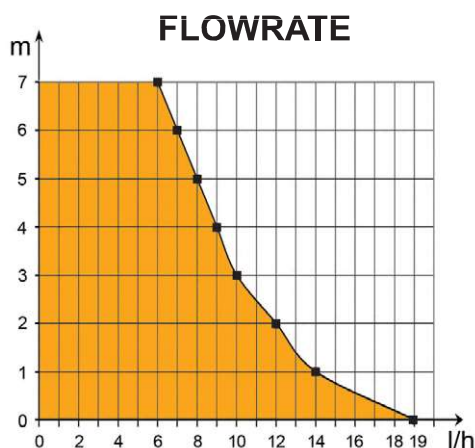

## CONTENTS

Pump - Inlet tube - Screws and rawplugs