

ECOTANK+ 1.2 / 2.5

SICCOM

Centrifugal tank pump for the removal of condensates from air conditioners, refrigerated displays or gas condensing boilers.

Ref ECOTANK+ 1.2 50Hz: DE12QCC610
 Ref ECOTANK+ 2.5 50Hz: DE25QCC620
 Ref ECOTANK+ 2.5 60Hz: DE25QCD140



Product upgrade

800 l/h

5.6 m

pH > 2.5




SPECIFICATIONS

	50Hz version	60Hz version
Flowrate max	800 l/h	800 l/h
Discharge head	5.6 m	6 m
pH tolerated	pH > 2.5	pH > 2.5
Condensates max temp.	60°C	60°C
Electrical power	65W	65W
Voltage	230V 50Hz	230V 60Hz
Alarm	NO-NC	NO-NC
Noise level		
Protection rating	IP24	IP24
Thermal protection	Yes	Yes
Operating cycle*	30%	30%
Cable length	1.5 m	1.5 m
Dimensions ECOTANK+ 1.2	280 x 130 x 129 mm	
Dimensions ECOTANK+ 2.5	280 x 130 x 159 mm	

* Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

** The pump is able to run 30% of the time if necessary.

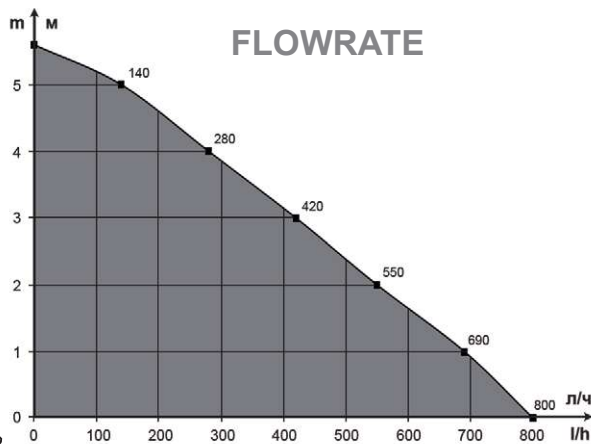

BENEFITS



High efficiency

Flowrate max: 800 l/h
 Discharge head max: 5.6 m



IP24 protection

The pump is protected against water splashes.



Universal electric plug

Power/alarm cable can be taken off, making easy installation and maintenance.



Outlet for 6/9 or 9/12 mm tube

Thanks to its connector supplied, the discharge can be made with a 6/9mm or a 9/12mm tube.



High capacity tank

Thanks to its 2.5 l tank, the ECOTANK+ 2.5 reduces the number of pumping cycles and answers to a great deal of applications.



Compact tank pump

With only 129mm height, the ECOTANK+ 1.2 fits easily in any space.



Reversible tank

Turning the tank allows to fit in any configuration.



CONTENTS

Pump - Cable power / alarm - 6/9mm outlet adaptor - Screws and rawplugs - PVC clear tube 6m (only in 60Hz version)