

FLOWATCH® SILENCE DESIGN DT20 **siccom**

The quietest trunking pump in the world!

A complete kit, with a quality trunking and all the accessories needed for installation! For air conditioners up to 20kW / 68000BTU.

Ref:DE20PMCE450



PREMIUM

NEW



16 dBA


certified by
official laboratory

NF EN ISO 3744 : 2012

Hose diameter

Suction : 5/7 mm - supplied


Discharge : 6/9 mm - not supplied

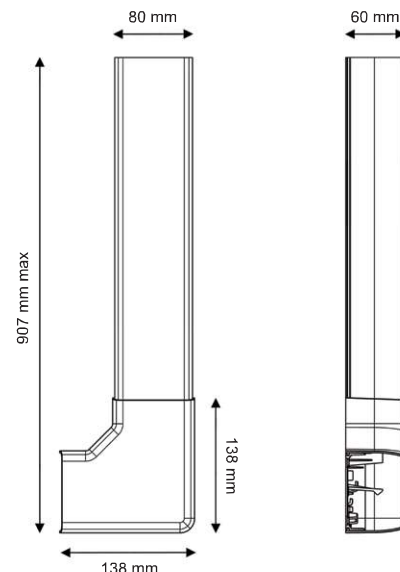


SPECIFICATIONS

Flowrate max	20 l/h
Suction head max	3 m
Discharge head max	10 m
Electrical power	3W
Voltage	Univolt 100-240V 50/60Hz
Alarm	NC
Noise level	16 dBA
Protection rating	IP24
Operating cycle*	100%
Power / alarm cable	1.6 m
Trunking dimensions	80 x 60 mm
Certifications	CE, UKCA, EAC

* The pump is able to run 100% of the time if necessary.

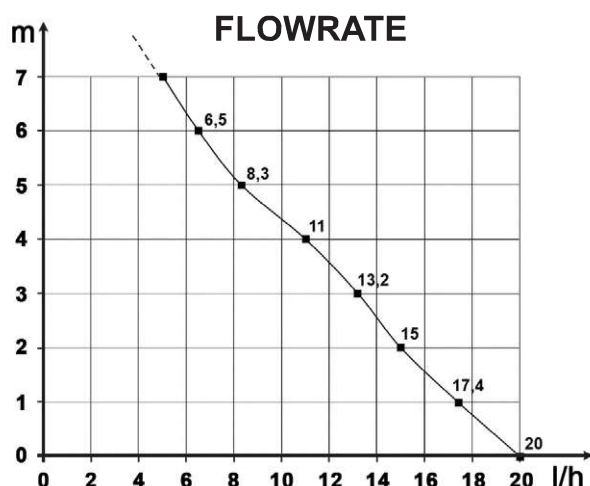

BENEFITS



Extreme silence

The trunking pump

THE MOST SILENT IN THE WORLD !



FLOWATCH® SILENCE DT20 included

Quite simply, the new standard on the market.

**DT20
TECHNO**

New Technology

Ultra-low power consumption, unrivalled silence, exceptional reliability... Tested and approved!

3W

Very low power consumption

Only 3W power consumption, during operation only!



Custom-made pump casing

For easy installation and perfect integration into the trunking.



New trunking

A market-standard trunking system that's aesthetically pleasing, easy to install and comes with a wide range of accessories.



Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.



Plug & Play connectors

Make installation and maintenance easier.

CONTENTS

Trunking with elbow - Finishing gasket - Finishing ceiling plate - Pump in absorber bracket - Stop Siphoning - Reservoir with air-vent tube - Power / alarm cable - Inlet tube - Suction tube 0.25m - Screws and rawlplugs

