

FLOWITA EVO DT36

SICCOM

A very silent, efficient, reliable and easy-to-install wall-mounted pump.
For air conditioners up to 40 kW / 136 000 BTU / 11.4 RT.
The new standard in condensate pumps!




PREMIUM

NEW



**ETL
version**

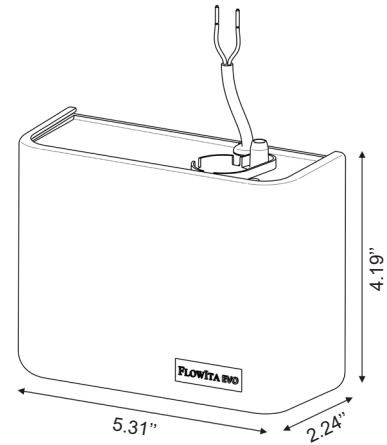

Hose diameter (internal)
Discharge: 0.23" - not supplied




SPECIFICATIONS

Flowrate max	9.5 gal/h - 36 l/h
Discharge head	33 ft - 10 m
Electrical power	3W
Voltage	Univolt 100-240V 50/60Hz
Alarm*	Optional
Noise level	
Protection rating	IP24
Operating cycle**	100%
Power cable	2.62 ft
Tank capacity	5.75 fl oz - 170 ml
Dimensions	5.31" x 2.24" x 4.19"
Certifications	ETL

* Alarm option available on request.

** The pump is able to run 100% of the time if necessary.

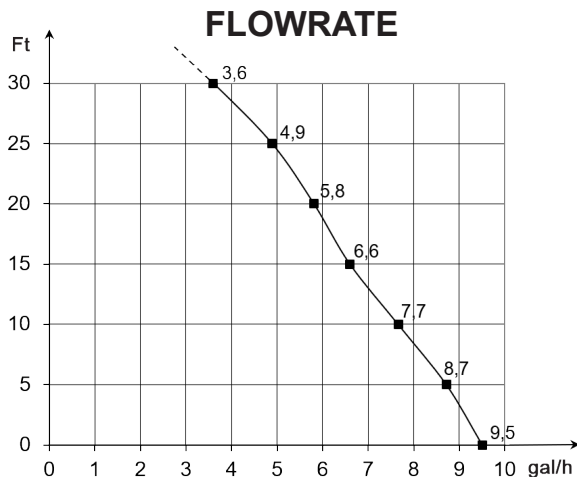

www.siccom.com

BENEFITS




Very low noise level

A «power / noise level» ratio unique on the market.

**DT36
TECHNO**

New technology

Ultra-low power consumption, high performance, exceptional reliability... Tested and approved!




Easy to disassemble

The FLOWITA EVO DT36 can be disassembled in seconds! Front panel, tank, suction tube... all the elements are removable. Installation and maintenance has never been so quick and easy!

3W

Very low power consumption

Only 3W power consumption, during operation only!



Quick installation

The FLOWITA EVO DT36 can be installed easily and quickly underneath any air conditioner.



IP24 protection

Protected against water splashes.

**FLOWITA
DT20**

FLOWITA EVO DT20 available

A softer and quieter version of the FLOWITA EVO (5.3 gal/h) for lighter equipment.

CONTENTS

Pump - Screws and rawplugs

