

# FLOWATCH® SILENCE DESIGN DT20 **SICCOM**

The quietest trunking pump in the world!  
 A complete kit, with a quality trunking and all the accessories needed for installation!  
 For air conditioners up to 20 kW / 68 000 BTU / 5.7 RT.




**PREMIUM**

**NEW**

**Certification pending**



Hose diameter  
 Suction : 0.20" - supplied  
 Discharge : 0.23" - not supplied

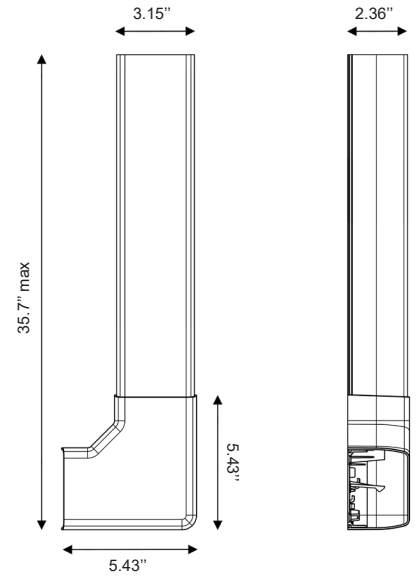


## SPECIFICATIONS

Flowrate max	5.3 gal/h - 20 l/h
Suction head max	10 ft - 3 m
Discharge head max	33 ft - 10 m
Electrical power	3W
Voltage	Univolt 100-240V 50/60Hz
Alarm	NC
Noise level	16 dBA
Protection rating	IP64
Operating cycle*	100%
Power / alarm cable	5.2 ft - 1.6 m
Trunking dimensions	3.15" x 2.36"
Certifications	ETL (certification pending)

\* The pump is able to run 100% of the time if necessary.

## BENEFITS



### Extreme silence

The trunking pump  
**THE MOST SILENT IN THE WORLD !**



### FLOWATCH® SILENCE DT20 included

Quite simply, the new standard on the market.

## DT20 TECHNO

### New Technology

Ultra-low power consumption, unrivalled silence, exceptional reliability... Tested and approved!

## 3W

### Very low power consumption

Only 3W power consumption, during operation only!



### Custom-made pump casing

For easy installation and perfect integration into the trunking.




### New trunking

A market-standard trunking system that's aesthetically pleasing, easy to install and comes with a wide range of accessories.



### Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.

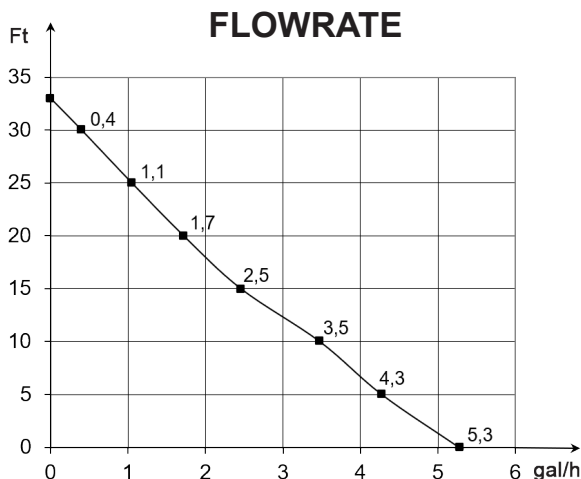

## CONTENTS

Trunking with elbow - Finishing gasket - Finishing ceiling plate - Pump in absorber bracket - Stop Siphoning - Reservoir with air-vent tube - Power / alarm cable - Inlet tube - Suction tube 9.84" - Screws and rawlplugs

