

FLOWITA EVO



SICCOM

Wall-mounted monobloc pump, dismantlable, for the condensate removal from air conditioners up to 10kW / 36000BTU.

Ref: DE05LCC440



NEW

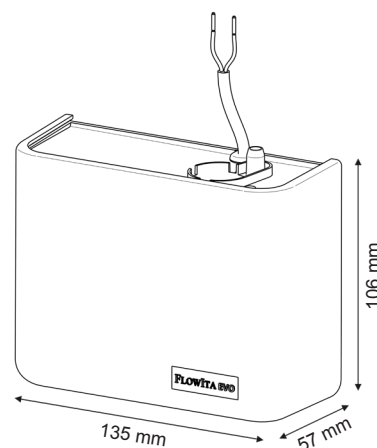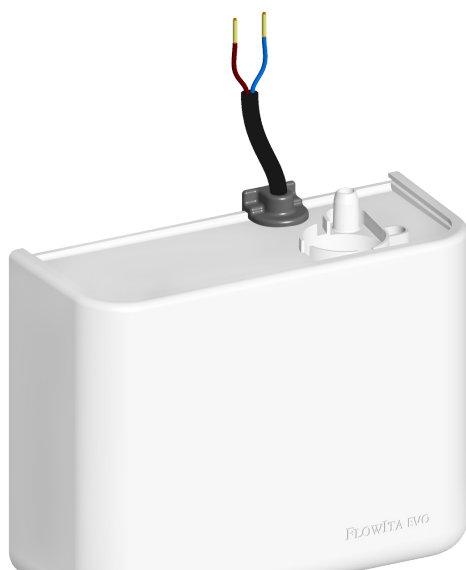

Hose diameter

Discharge : 6/9 mm - not supplied

SPECIFICATIONS


Flowrate max	13.2 l/h
Discharge head	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm*	Optional
Noise level**	
Protection rating	IP24
Thermal protection	Yes
Operating cycle***	100%
Power cable	0.8 m
Tank capacity	170 ml
Dimensions	135 x 57 x 106.5 mm

* Alarm option available on request.

** Notation from 1 wave (≤ 20 dBA) to 6 waves (> 45 dBA)

*** The pump is able to run 100% of the time if necessary.

FLOWRATE

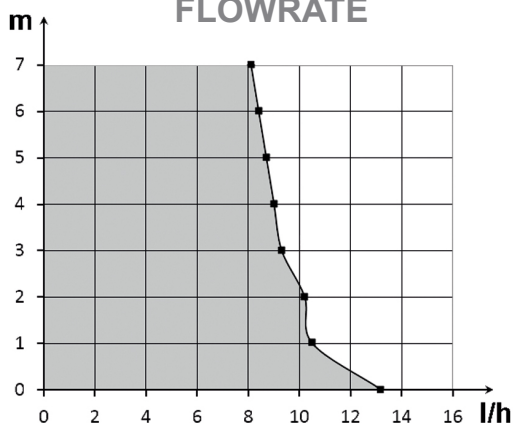


BENEFITS

Dismountable

The FLOWITA EVO can be disassembled in seconds!

Front panel, tank, suction tube... all the elements are removable.

Installation and maintenance has never been so quick and easy!



100ml pumping cycles

Its large reservoir allows the pump to operate optimally: larger and less frequent pumping cycles.



Extremely silent

The most discreet wall-mounted pump on the market!



Quick installation

The FLOWITA EVO can be installed easily and quickly underneath any air conditioner.



IP24 protection

Protected against water splashes.

CONTENTS

Pump - Screws and rawplugs

