



FLOWATCH® SILENCE DT20 **SICCOM**

The perfect combination of silence, performance, reliability and simplicity.
 For air conditioners up to 20 kW / 68 000 BTU / 5.7 RT.
 The new standard in condensate pumps!

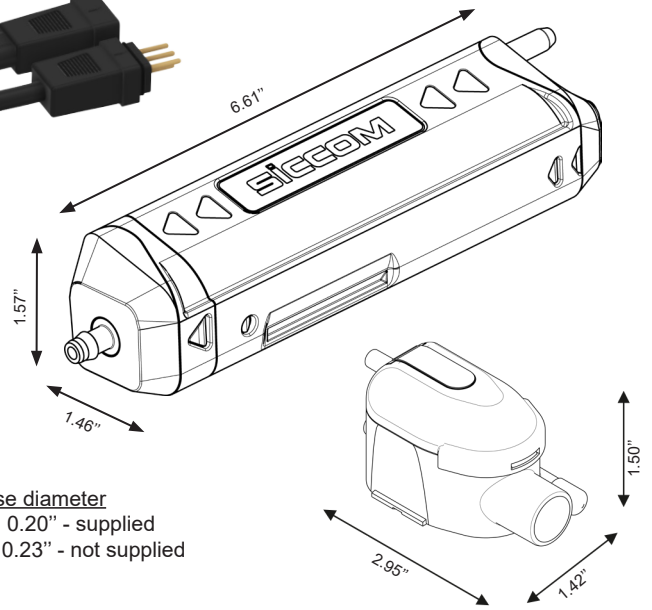

PREMIUM
NEW Certification pending



Hose diameter
 Suction : 0.20" - supplied
 Discharge : 0.23" - not supplied




SPECIFICATIONS


Flowrate max	5.3 gal/h - 20 l/h
Suction head max	10 ft - 3 m
Discharge head max	33 ft - 10 m
Electrical power	3W
Voltage	Univolt 100-240V 50/60Hz
Alarm	NC
Noise level	17 dBA
Protection rating	IP64
Operating cycle*	100%
Power / alarm cable	5.2 ft - 1.6 m
Dimensions	6.61" x 1.46" x 1.57" / 2.95" x 1.50" x 1.42"
Certifications	ETL (certification pending)

* The pump is able to run 100% of the time if necessary.

FLOWRATE

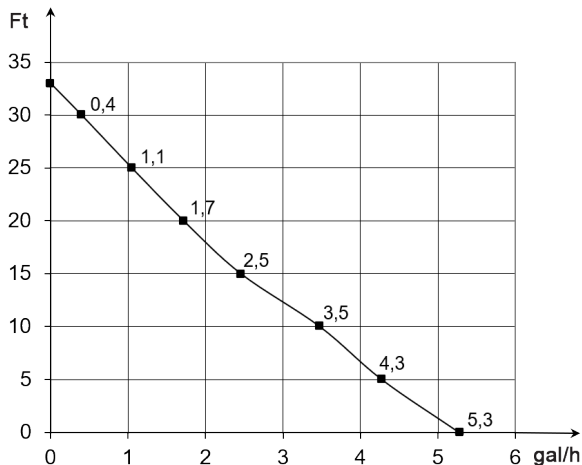

BENEFITS



Extreme silence

An unrivalled user experience. No disturbance, even in the bedroom.

DT20 TECHNO

New technology

Ultra-low power consumption, unrivalled silence, exceptional reliability... Tested and approved!



IP64 protection

Protected against water splashes and dust.



Plug & Play connectors

Make installation and maintenance easier and faster.

3W

Very low power consumption

Only 3W power consumption, during operation only!



Mounting ring

The pump can be suspended with a clamp to facilitate its installation.



Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.

CONTENTS

Pump - Reservoir with air-vent tube - Power / alarm cable - Stop Siphoning - Reservoir stand - Double-sided adhesives - Inlet tube - Suction tube 5.9 ft - 3 clamps

